

EVOLUTION



Fig. A




Fig. C





Fig. B

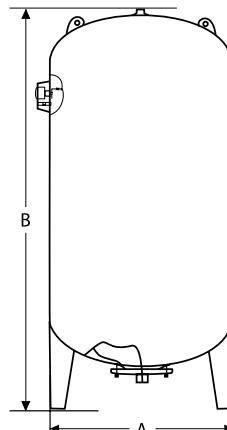

Depósitos de membrana fabricada en EPDM, atóxica e intercambiable, especial para uso alimentario y circuitos de calefacción. Están construidos en chapa de acero embutido con acabado fosfatado pintado y secado.

Temperatura máxima de servicio: de -5°C hasta 100°C. Los acumuladores de más de 100 litros (incluido) se suministran de serie con manómetro para fácil lectura de la presión. **Bajo demanda pueden suministrarse para presiones de 16 bar o de 25 bar.**

Membrane tanks manufactured with EPDM membrane, non-toxic and interchangeable, especially for food use and hot water circuits. They are constructed of pressed steel, painted with exterior trim drying and phosphate.

Maximum temperature: -5°C to +100°C. All tank with more than 100 liters (included) are supplied, as standard, with pressure gauge for easy pressure reading. **On request can be supplied for pressures of 16 bar or 25 bar.**



Accumuladores Accumulators	Capacidad Capacity	Presión Máxima Max. pressure bar	Dimensiones / Dimensions		Salida Ø Outlet Ø	Figura Figure	Peso Weight	Volumen Volume
EVO 8 EXP	8 lts	10 bar	220	320	1"	A	2,9 Kg.	0,016 m ³
EVO 12 EXP	12 lts		220	380	1"	A	3,8 Kg.	0,018 m ³
EVO 19 EXP	19 lts		280	430	1"	A	4 Kg.	0,034 m ³
EVO 24 EXP	24 lts		360	325	1"	A	4,5 Kg.	0,037 m ³
EVO 35 EXP	35 lts		380	470	1"	A	7,5 Kg.	0,068 m ³
EVO 50 EXP	50 lts		380	560	1"	A	8,5 Kg.	0,081 m ³
EVO 50-16 EXP	50 lts	16 bar	380	580	1"	A	14 Kg.	0,084 m ³
EVO 50 VER	50 lts		380	750	1"	B	11 Kg.	0,108 m ³
EVO 80 VER	80 lts		430	960	1"	B	17 Kg.	0,161 m ³
EVO 100 VER	100 lts		460	990	1"	B	18 Kg.	0,209 m ³
EVO 150 VER	150 lts		500	1100	1"	B	29 Kg.	0,280 m ³
EVO 200 VER	200 lts		590	1120	1 1/4"	B	38 Kg.	0,390 m ³
EVO 300 VER	300 lts		640	1230	1 1/4"	B	45 Kg.	0,504 m ³
EVO 500 VER	500 lts		750	1550	1 1/4"	B	75 Kg.	0,872 m ³
EVO 750 VER	750 lts		750	1950	2"	B	110 Kg.	1,248 m ³
EVO 1000 VER	1000 lts		800	2180	2"	B	155 Kg.	1,408 m ³
EVO 1500 VER	1500 lts		960	2380	2"	B	230 Kg.	2,212 m ³
EVO 24 HOR	24 lts		470	280	1"	C	4 Kg.	0,037 m ³
EVO 50 HOR	50 lts		620	380	1"	C	10,5 Kg.	0,084 m ³
EVO 80 HOR	80 lts		720	430	1"	C	17 Kg.	0,133 m ³
EVO 100 HOR	100 lts		800	460	1"	C	23 Kg.	0,169 m ³