


ACUMULADORES HIDRONEUMÁTICOS GALVANIZADOS

- Acumuladores sin membrana.
- Temperatura -10° +60°C.
- Acumuladores fabricados en Acero Galvanizado.


Modelos verticales 8 BAR

| Peso (Kg.) | Código | Modelo Capacidad (l.) | Presión (Max. Bar) | Dimensiones | | Conexión de Agua | | | | Euros (€) |
|------------|----------|-----------------------|--------------------|-------------|------|------------------|--------|------|--------|-----------|
| | | | | Ø D | H | a-u | v-s | b | c | |
| 77 | 10050008 | 500 DG | 8 | 650 | 1860 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 119 | 10075008 | 750 DG | 8 | 750 | 2080 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 195 | 10100008 | 1000 DG | 8 | 800 | 2350 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |

| Peso (Kg.) | Código | Modelo Capacidad (l.) | Presión (Max. Bar) | Dimensiones | | Conexión de Agua | | | | Euros (€) |
|------------|----------|-----------------------|--------------------|-------------|------|------------------|--------|------|--------|-----------|
| | | | | Ø D | H | a-u | v-s | b | c | |
| 250 | 10125101 | 1250 DG | 8 | 900 | 2380 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 264 | 10150101 | 1500 DG | 8 | 950 | 2465 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 368 | 10200101 | 2000 DG | 8 | 1100 | 2490 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 413 | 10250101 | 2500 DG | 8 | 1100 | 3045 | 2 1/2" | 1 1/2" | 1/2" | 1 1/2" | |
| 550 | 10300101 | 3000 DG | 8 | 1200 | 3200 | 2 1/2" | 2" | 1/2" | 1 1/2" | |
| 690 | 10400101 | 4000 DG | 8 | 1400 | 3140 | 4" | 2" | 1/2" | 1 1/2" | |
| 898 | 10500101 | 5000 DG | 8 | 1400 | 3790 | 4" | 2" | 1/2" | 1 1/2" | |
| 1.450 | 10700101 | 7000 DG | 8 | 1500 | 4500 | 4" | 2" | 1/2" | 1 1/2" | |

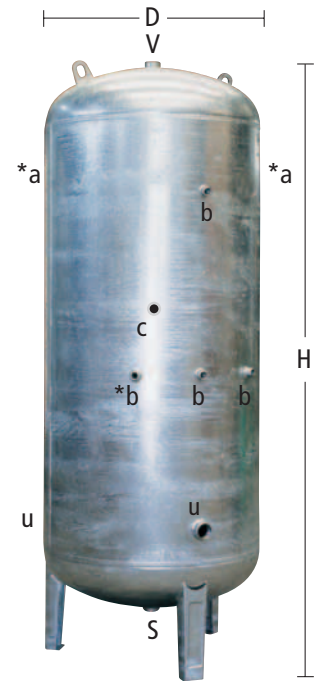

(*) Para acumuladores superiores a 1.000 litros

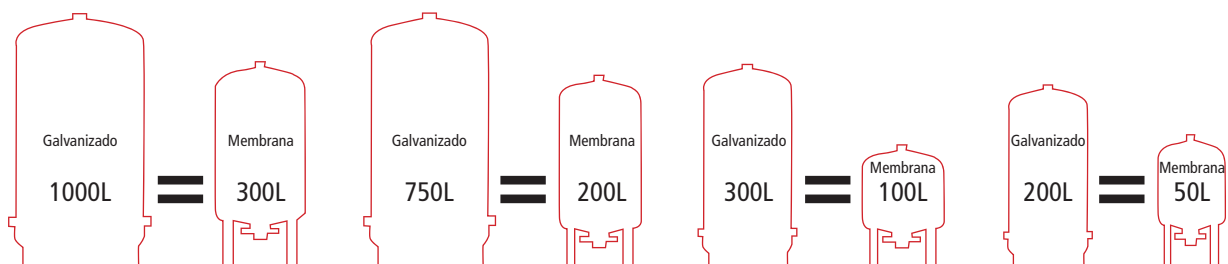


ACUMULADORES HIDRONEUMÁTICOS GALVANIZADOS

- Acumuladores sin membrana.
- Temperatura -10° +60°C.
- Acumuladores fabricados en Acero Galvanizado.


Modelos verticales 10 BAR

| Peso (Kg.) | Código | Modelo Capacidad (l.) | Presión (Max. Bar) | Dimensiones | | Conexión de Agua | | | | Euros (€) |
|------------|----------|-----------------------|--------------------|-------------|------|------------------|--------|------|--------|-----------|
| | | | | Ø D | H | a-u | v-s | b | c | |
| 22 | 10010010 | 100 DG | 10 | 400 | 1090 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 36 | 10020010 | 200 DG | 10 | 500 | 1385 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 48 | 10030010 | 300 DG | 10 | 550 | 1615 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 85 | 10050010 | 500 DG | 10 | 650 | 1860 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 158 | 10075010 | 750 DG | 10 | 750 | 2080 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |
| 227 | 10100010 | 1000 DG | 10 | 800 | 2350 | 1 1/2" | 1 1/2" | 1/2" | 1 1/4" | |

| Peso (Kg.) | Código | Modelo Capacidad (l.) | Presión (Max. Bar) | Dimensiones | | Conexión de Agua | | | | Euros (€) |
|------------|----------|-----------------------|--------------------|-------------|------|------------------|--------|------|--------|-----------|
| | | | | Ø D | H | a-u | v-s | b | c | |
| 302 | 10125301 | 1250 DG | 10 | 900 | 2380 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 343 | 10150301 | 1500 DG | 10 | 950 | 2465 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 490 | 10200301 | 2000 DG | 10 | 1100 | 2490 | 2" | 1 1/2" | 1/2" | 1 1/2" | |
| 555 | 10250301 | 2500 DG | 10 | 1100 | 3045 | 2 1/2" | 1 1/2" | 1/2" | 1 1/2" | |
| 640 | 10300301 | 3000 DG | 10 | 1200 | 3200 | 2 1/2" | 2" | 1/2" | 1 1/2" | |
| 870 | 10400301 | 4000 DG | 10 | 1400 | 3140 | 4" | 2" | 1/2" | 1 1/2" | |
| 1.030 | 10500301 | 5000 DG | 10 | 1400 | 3790 | 4" | 2" | 1/2" | 1 1/2" | |
| 1.770 | 10700301 | 7000 DG | 10 | 1500 | 4500 | 4" | 2" | 1/2" | 1 1/2" | |

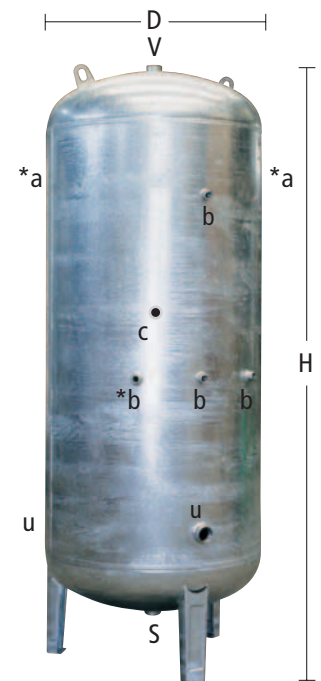

(*) Para acumuladores superiores a 1.000 litros

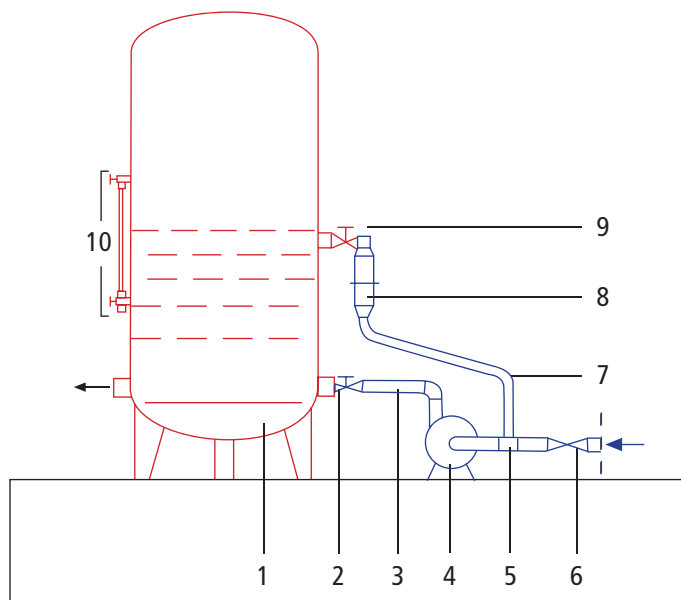

1. Acumulador
2. Llave de descarga
3. Tubo flexible
4. Electrobomba
5. Latiguillo
6. Válvula retención
7. Tubo flexible
8. Alimentación de aire
9. Llave de descarga
10. Tubo de nivel