



TECHNICAL DATA

Operating range:

from 2 to 92 m³/h with head up to 67 metres.

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, non-crystallised and chemically neutral, with properties similar to water. Maximum glycol content 30 % (for other glycol percentages contact Technical Support).

Pumped liquid temperature range: from -15 °C to +120 °C.

Maximum ambient temperature: +40°C.

Maximum operating pressure: 10 bar (1000 kPa).

Standard flanges:

DN 40, DN 50, DN 65, DN 80 - PN 6/PN 10 (4 holes).

Flanges on request: DN 80 - PN 16 (8 holes).

Counter flanges on request:

threaded DN 40, DN 50, DN 65 in PN 10.

welded DN 40, DN 50, DN 65, in PN 10/PN 16 (4 holes).

welded DN 80 in PN 10/PN 16 (8 holes)

Special executions on requests: alternative voltages and frequencies.

APPLICATIONS

Hot or cold water circulation pump with in-line ports, suitable for installation directly on the pipework of civil and industrial heating, air conditioning, refrigeration, and sanitary water systems.

CONSTRUCTION FEATURES OF THE PUMP

Pump body and motor support in cast iron.

PN 10 flanged suction and delivery ports with threaded holes for control manometers. To make replacement in existing systems easier, the pump can accept PN 6 counter flanges.

Technopolymer impeller.

Carbon/ceramic mechanical seal.

The pumps are available both in the single (KLM-KLP) and in the twin (DKLM-DKLP) versions.

For the single version a built in clapet valve in the delivery port is also included, to avoid water recirculation when the unit is idle. A blind flange is also supplied as a standard, to be used during maintenance of one of the two motors.

The twin version gives the possibility of alternating the operation of the pumps when a backup unit is required, or to have the two pumps operating simultaneously.

CONSTRUCTION FEATURES OF THE MOTOR

External ventilation cooling, closed, asynchronous type, with four poles for the KLM and DKLM versions, and two poles for the KLP and DKLP versions.

Rotor running on permanently lubricated ball bearings, oversized to ensure low noise and durability.

Standard built-in thermo-amperometric protection. Capacitor permanently fitted on single phase versions.

For the protection of the three-phase motor, we recommend the use of remote overload cut-outs, in compliance with current local regulations.

Construction according to CEI 2-3.

Protection class: IP 55



Insulation class: F

Standard voltage: single-phase 220-240 V, 50 Hz.
 three-phase 230/400 V, 50 Hz


MATERIALS

N.	PARTS*	MATERIALS
1	PUMP BODY	CAST IRON 250 UNI ISO 185
3	SUPPORT	CAST IRON 250 UNI ISO 185
4	IMPELLER	TECHNOPOLYMER B
7	SHAFT WITH ROTOR	AISI 303 STAINLESS STEEL X10 CrNiS 1809 UNI 6900/71
16	MECHANICAL SEAL	CARBON / CERAMIC
26	OR RING	EPDM RUBBER

* In contact with the liquid

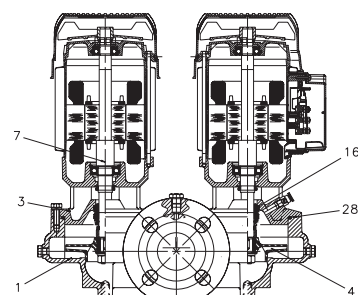



– Denomination index:
(example)




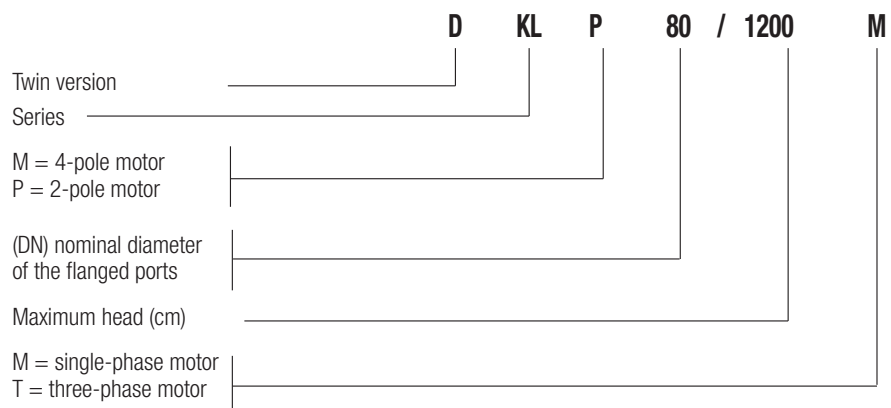


Installation: horizontal or vertical position, provided that the motor is always above the pump.

KLM / KLP




DKLM / DKLP



PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

GRAPHIC SELECTION TABLE

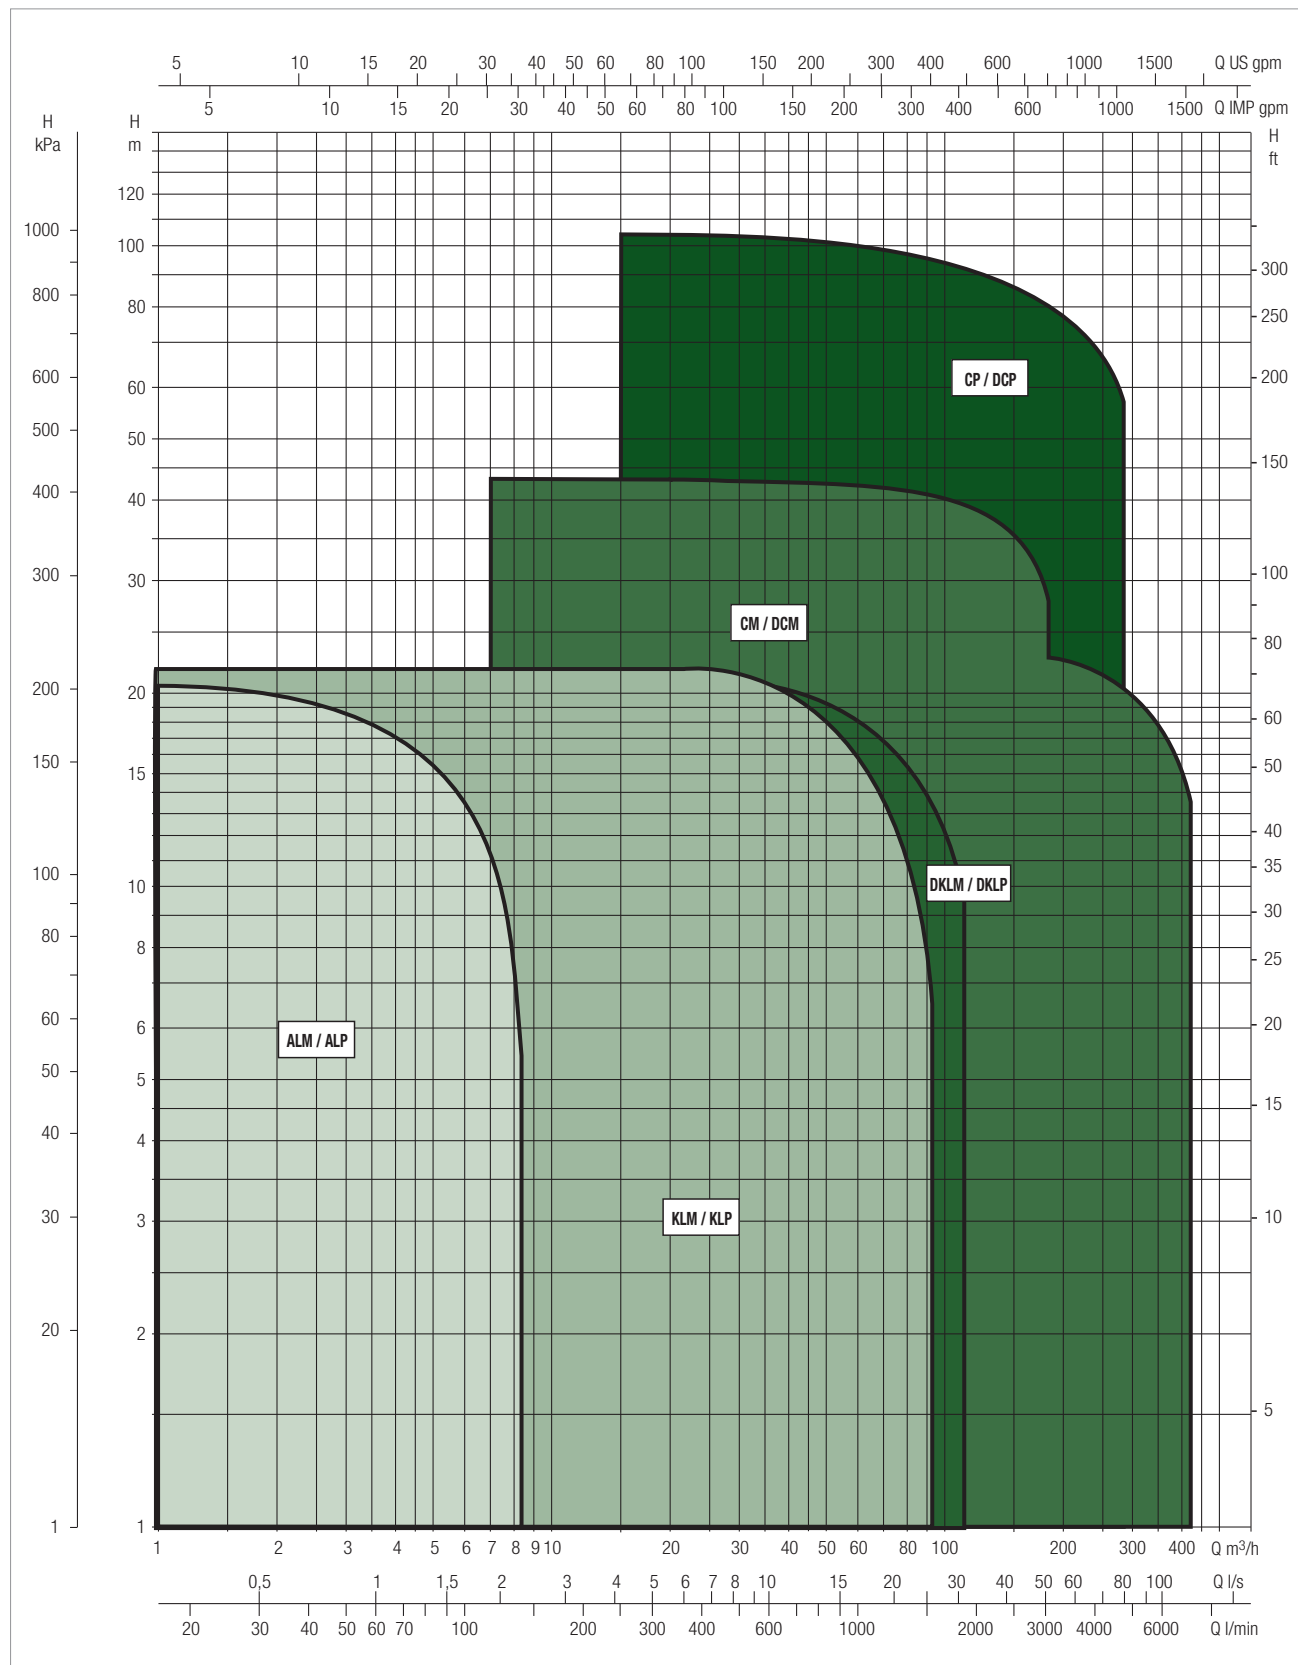

SELECTION TABLE - KLM / KLP

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000
KLM 40-300 M	H (m)	3,4	3,2	3	2,6	2,3	1,7											
KLM 40-300 T		3,4	3,2	3	2,6	2,3	1,7											
KLP 40-600 M		8,2			7,8	7,4	6,9	6,3	5,7	4								
KLP 40-600 T		8,2			7,8	7,4	6,9	6,3	5,7	4								
KLP 40-900 M		10,2			9,8	9,4	8,8	8,2	7,4	5,6								
KLP 40-900 T		10,2			9,8	9,4	8,8	8,2	7,4	5,6								
KLP 40-1200 M		13,7			13,2	12,6	11,9	11,2	10,4	8,4	5,9							
KLP 40-1200 T		13,7			13,2	12,6	11,9	11,2	10,4	8,4	5,9							
KLP 40-1600 M		16,5	16,0	15,7	15,5	15,1	14,8	14,4	13,9	12,7	11,1	9,2	8,0					
KLP 40-1600 T		16,5	16,0	15,7	15,5	15,1	14,8	14,4	13,9	12,7	11,1	9,2	8,0					
KLP 40-1800 T		18,9	18,4	18,1	17,8	17,4	17,0	16,5	16,0	14,6	13,0	11,0	9,9	2,7				
KLP 40-1800 M		18,9	18,4	18,1	17,8	17,4	17,0	16,5	16,0	14,6	13,0	11,0	9,9	2,7				

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000
KLM 50-300 M	H (m)	2,9			2,8	2,7	2,6	2,5	2,3	1,8	1,3							
KLM 50-300 T		2,9			2,8	2,7	2,6	2,5	2,3	1,8	1,3							
KLP 50-900 M		8,9				8,8	8,7	8,6	8,5	8	7,4	6,6	6,3	3,9				
KLP 50-900 T		8,9				8,8	8,7	8,6	8,5	8	7,4	6,6	6,3	3,9				
KLP 50-1200 M		12				12	11,8	11,6	11	10,5	9,8	9	8,6	6,2				
KLP 50-1200 T		12				12	11,8	11,6	11	10,5	9,8	9	8,6	6,2				
KLP 50-1600 M		16,2	16,1	16,0	15,8	15,7	15,5	15,3	15,1	14,5	13,9	13,1	12,7	10	7,04	3,93		
KLP 50-1600 T		16,2	16,1	16,0	15,8	15,7	15,5	15,3	15,1	14,5	13,9	13,1	12,7	10	7,04	3,93		
KLP 50-2000 M		23,4	23,3	23,3	23,2	23,2	23,1	22,9	22,8	22,4	21,8	21,0	20,6	18,2	15,2	12		
KLP 50-2000 T		23,4	23,3	23,3	23,2	23,2	23,1	22,9	22,8	22,4	21,8	21,0	20,6	18,2	15,2	12		

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000
KLM 65-300 T	H (m)	3,1				3	2,9	2,8	2,7	2,6	2,4	2	1,8					
KLM 65-600 T		5,5						5,3	5	4,7	4,6	4	3,8	2,5				
KLP 65-900 T		9							8,8	8,6	8,5	8,1	8	7	5,5	3,5		
KLP 65-1200 T		12								11,6	11,4	11,2	11	10	8,8	6,7		
KLP 65-1600 T		17,2	17,1	17,1	17,1	17,2	17,2	17,2	17,2	17,2	17,2	17,0	16,9	15,8	14,1	11,9	6,41	
KLP 65-2000 T		20,6	20,6	20,7	20,7	20,7	20,7	20,7	20,7	20,6	20,4	20,1	19,9	18,8	17,2	15,1	9,61	

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400
KLM 80-300 T	H (m)	3,3								3,2	3,1	3	2,9	2,7	2	1,2				
KLM 80-600 T		5,7									5,8	5,8	5,7	5,5	5	4,3	2,5			
KLP 80-900 T		8,8									8,7	8,6	8,5	8,4	8	7,7	6			
KLP 80-1200 T		11,8												11,6	11,5	11	9,7	7,2		
KLP 80-1600 T		16,2	16,3	16,3	16,3	16,4	16,4	16,4	16,5	16,5	16,5	16,5	16,3	15,9	15,4	13,9	11,7	8,7	5,3	
KLP 80-2000 T		20,7	20,9	20,9	21,0	21	21,1	21,2	21,2	21,3	21,3	21,3	21,2	21	20,6	19,4	17,5	14,9	11,4	

SELECTION TABLE - DKLM / DKLP

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000
DKLM 40-300 M	H (m)	3,4	3,2	3	2,6	2,3	1,7											
DKLM 40-300 T		3,4	3,2	3	2,6	2,3	1,7											
DKLP 40-600 M		8,2			7,8	7,4	6,9	6,3	5,7	4								
DKLP 40-600 T		8,2			7,8	7,4	6,9	6,3	5,7	4								
DKLP 40-900 M		10,2			9,8	9,4	8,8	8,2	7,4	5,6								
DKLP 40-900 T		10,2			9,8	9,4	8,8	8,2	7,4	5,6								
DKLP 40-1200 M		13,7			13,2	12,6	11,9	11,2	10,4	8,4	5,9							
DKLP 40-1200 T		13,7			13,2	12,6	11,9	11,2	10,4	8,4	5,9							
DKLP 40-1600 M		16,7	16,3	16,2	16,0	15,9	15,7	15,5	15,2	14,7	14,0	13,2	12,8	10,1	6,6			
DKLP 40-1600 T		16,7	16,3	16,2	16,0	15,9	15,7	15,5	15,2	14,7	14,0	13,2	12,8	10,1	6,6			
DKLP 40-1800 M		19,2	19,1	18,9	18,7	18,4	18,2	17,9	17,6	16,9	16,2	15,5	15,1	12,4	8,7	4,9		
DKLP 40-1800 T		19,2	19,1	18,9	18,7	18,4	18,2	17,9	17,6	16,9	16,2	15,5	15,1	12,4	8,7	4,9		



MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000
DKLM 50-300 M	H (m)	2,9			2,8	2,7	2,6	2,5	2,3	1,8	1,3							
DKLM 50-300 T		2,9			2,8	2,7	2,6	2,5	2,3	1,8	1,3							
DKLP 50-900 M		8,9				8,8	8,7	8,6	8,5	8	7,4	6,6	6,3	3,9				
DKLP 50-900 T		8,9				8,8	8,7	8,6	8,5	8	7,4	6,6	6,3	3,9				
DKLP 50-1200 M		12				12	11,8	11,6	11	10,5	9,8	9	8,6	6,2				
DKLP 50-1200 T		12				12	11,8	11,6	11	10,5	9,8	9	8,6	6,2				
DKLP 50-1600 M		16,6	16,5	16,4	16,3	16,2	16,1	16,0	15,8	15,6	15,2	14,9	14,7	13,6	12,1	10,1	5,6	
DKLP 50-1600 T		16,6	16,5	16,4	16,3	16,2	16,1	16,0	15,8	15,6	15,2	14,9	14,7	13,6	12,1	10,1	5,6	
DKLP 50-2000 M		23,6	23,5	23,4	23,4	23,3	23,2	23,1	23,0	22,8	22,6	22,3	22,1	21,1	19,8	18,2	13,6	8,0
DKLP 50-2000 T		23,6	23,5	23,4	23,4	23,3	23,2	23,1	23,0	22,8	22,6	22,3	22,1	21,1	19,8	18,2	13,6	8,0

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400
DKLM 65-300 T	H (m)	3,1				3	2,9	2,8	2,7	2,6	2,4	2	1,8							
DKLM 65-600 T		5,5						5,3	5	4,7	4,6	4	3,8	2,5						
DKLP 65-900 T		9						8,8	8,6	8,5	8,1	8	7	5,5	3,5					
DKLP 65-1200 T		12							11,6	11,4	11,2	11	10	8,8	6,7					
DKLP 65-1600 T		17,2	17,2	17,2	17,2	17,2	17,2	17,2	17,2	17,1	17,0	17,0	16,6	16,2	15,5	13,8	11,4	8,4		
DKLP 65-2000 T		20,5	20,5	20,5	20,5	20,5	20,4	20,4	20,4	20,3	20,2	20,2	20,1	19,8	19,5	18,9	17,0	14,3	11,1	7,6

MODEL	Q=m³h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	12	14,4	16,8	18	24	30	36	48	60	72	84	96	108
	Q=l/min	0	40	60	80	100	120	140	160	200	240	280	300	400	500	600	800	1000	1200	1400	1600	1800
DKLM 80-300 T	H (m)	3,3								3,2	3,1	3	2,9	2,7	2	1,2						
DKLM 80-600 T		5,7								5,8	5,8	5,7	5,5	5	4,3	2,5						
DKLP 80-900 T		8,8								8,7	8,6	8,5	8,4	8	7,7	6						
DKLP 80-1200 T		11,8												11,6	11,5	11	9,7	7,2				
DKLP 80-1600 T		16,2	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,3	16,2	16,0	15,7	15,1	14,3	13,3	12,0	10,3	8,5	
DKLP 80-2000 T		20,5	20,6	20,7	20,7	20,7	20,8	20,8	20,8	20,8	20,7	20,7	20,7	20,5	20,4	20,2	19,8	19,2	18,2	16,9	15,3	13,5

KLM / KLP 40 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

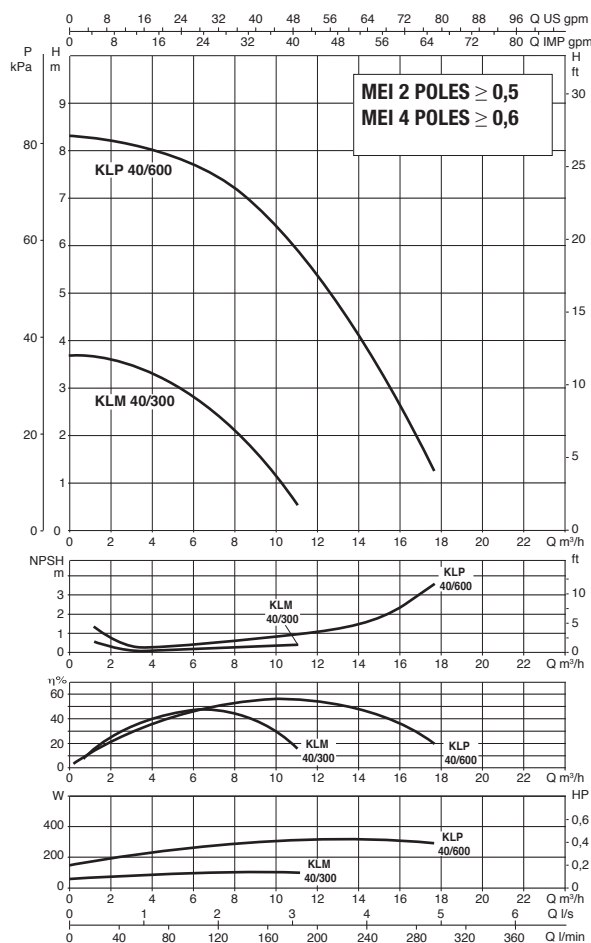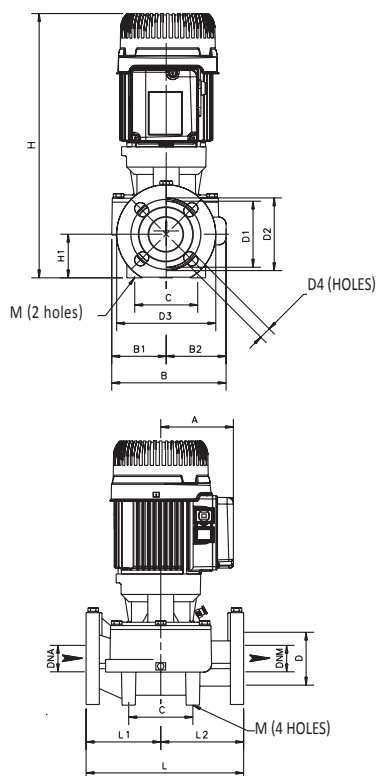



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
KLM 40-300 M	250	DN 40	1 x 220 - 240 V ~	4 POLES	1420	0,20	0,10	0,14	1,12	8	450
KLM 40-300 T	250	DN 40	3 x 230 / 400 V ~	4 POLES	1466	0,16	0,10	0,14	1,04-0,6	-	-
KLP 40-600 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2937	0,60	0,30	0,41	3,29	20	450
KLP 40-600 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2898	0,49	0,30	0,41	2,13-1,23	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																			L/A	L/B	H		
KLM 40/300	110	179	82	97	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	250	125	125	2 HOLES 10	470	280	330	0,043	21,1
KLP 40/600	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	22,5

KLM / KLP 40 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

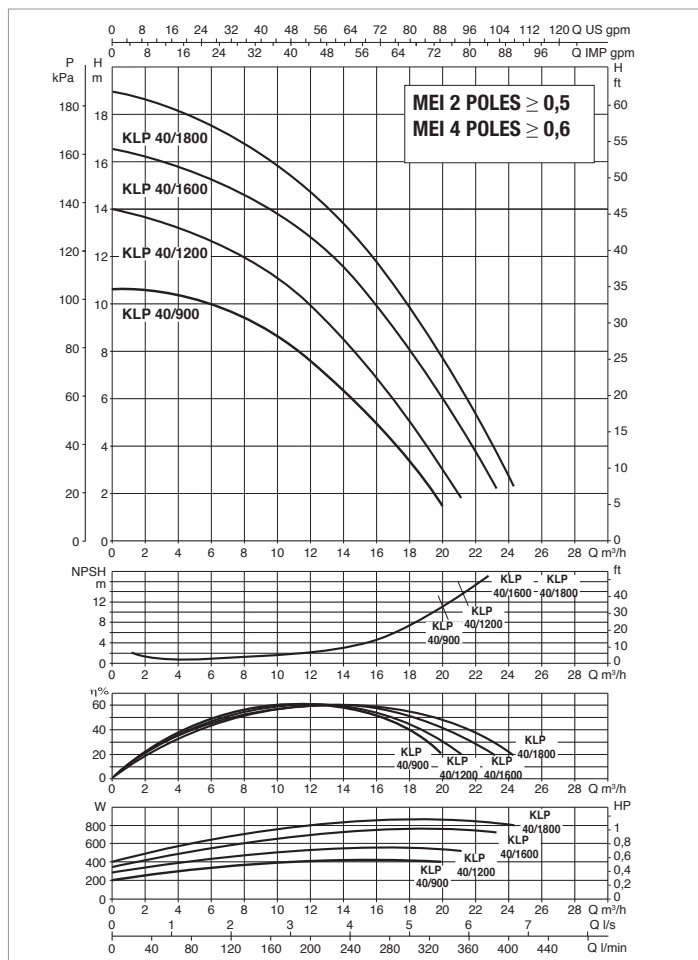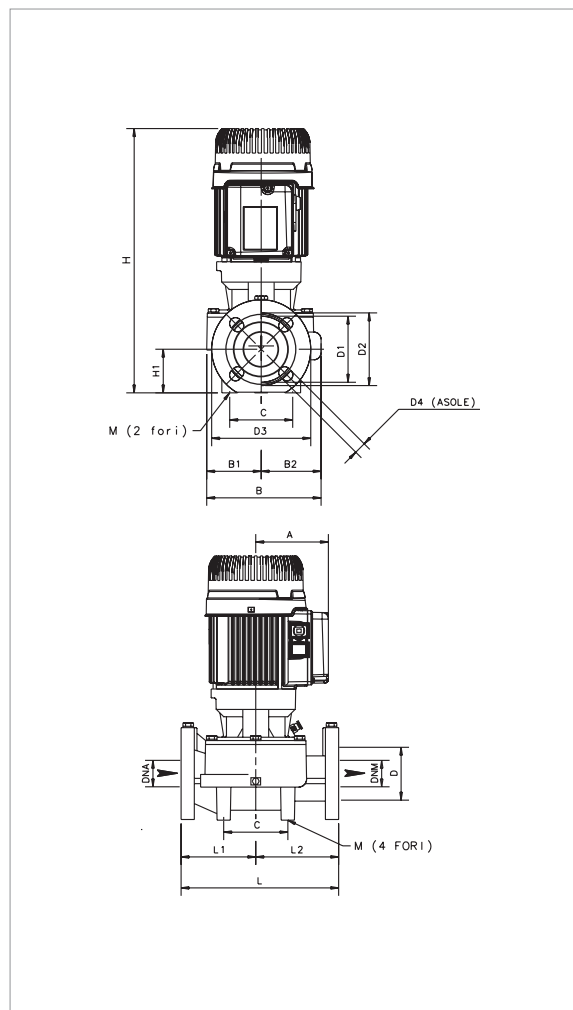



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
KLP 40-900 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2913	0,73	0,41	0,56	3,75	20	450
KLP 40-900 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2851	0,63	0,41	0,56	2,37-1,37	-	-
KLP 40-1200 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2873	0,91	0,54	0,73	4,40	20	450
KLP 40-1200 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2776	0,82	0,54	0,73	2,70-1,56	-	-
KLP 40-1600 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2812	1,18	0,75	1,01	4,71	20	450
KLP 40-1600 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2840	0,96	0,75	1,01	3,72-2,15	-	-
KLP 40-1800 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2812	1,18	0,85	1,16	5,44	20	450
KLP 40-1800 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2841	1,09	0,85	1,15	4-2,31	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																			L/A	L/B	H		
KLP 40/900	110	179	82	97	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	250	125	125	2 HOLES 10	470	280	330	0,043	22,5
KLP 40/1200	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	23,2
KLP 40-1600	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	23,5
KLP 40-1800	110	179	82	97	100	40	40	80	100	110	150		396	66	250	125	125		470	280	330	0,043	24,5

KLM / KLP 50 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

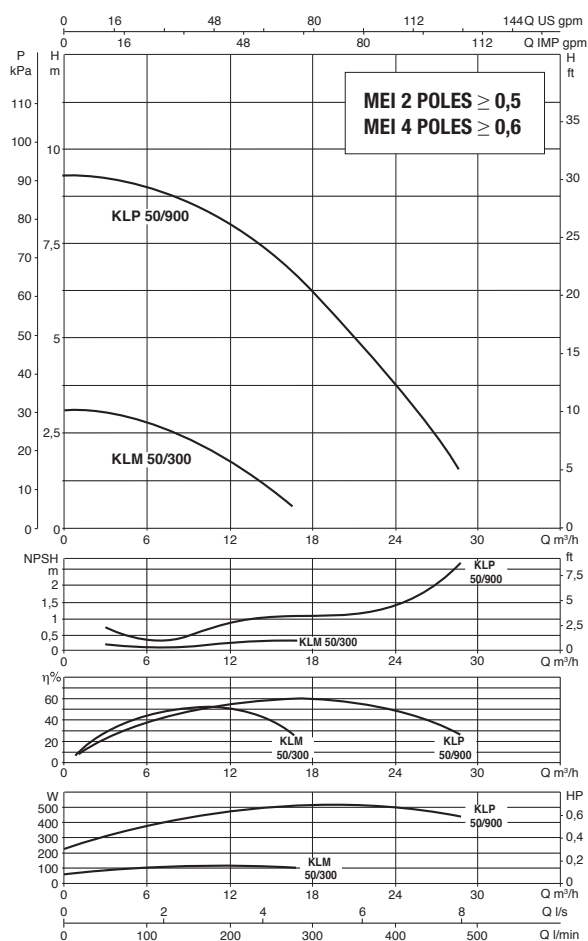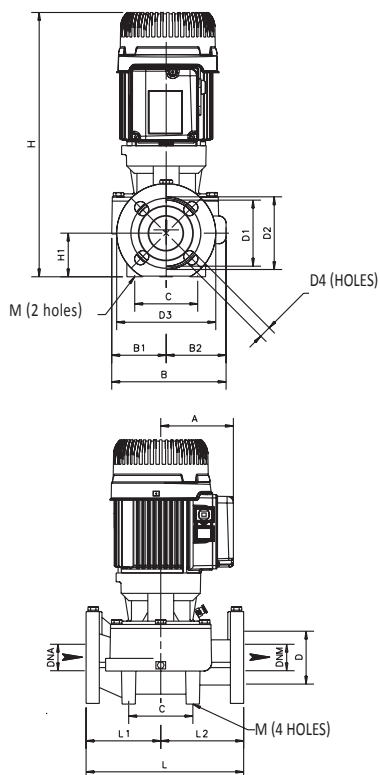



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
KLM 50-300 M	280	DN 50	1 x 220 - 240 V ~	4 POLES	1410	0,21	0,11	0,15	1,10	8	450
KLM 50-300 T	280	DN 50	3 x 230 / 400 V ~	4 POLES	1463	0,17	0,11	0,15	1,02-0,59	-	-
KLP 50-900 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2898	0,80	0,51	0,69	4,02	20	450
KLP 50-900 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2897	0,67	0,51	0,69	3,39-1,96	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg	
																			L/A	L/B	H			
KLM 50/300	110	204	94	110	100	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	280	140	170	2 HOLES 10		470	280	330	0,043	24,2
KLM 50/600	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170			470	280	330	0,043	24,6
KLP 50/900	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170			470	280	330	0,043	26,5

KLM / KLP 50 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

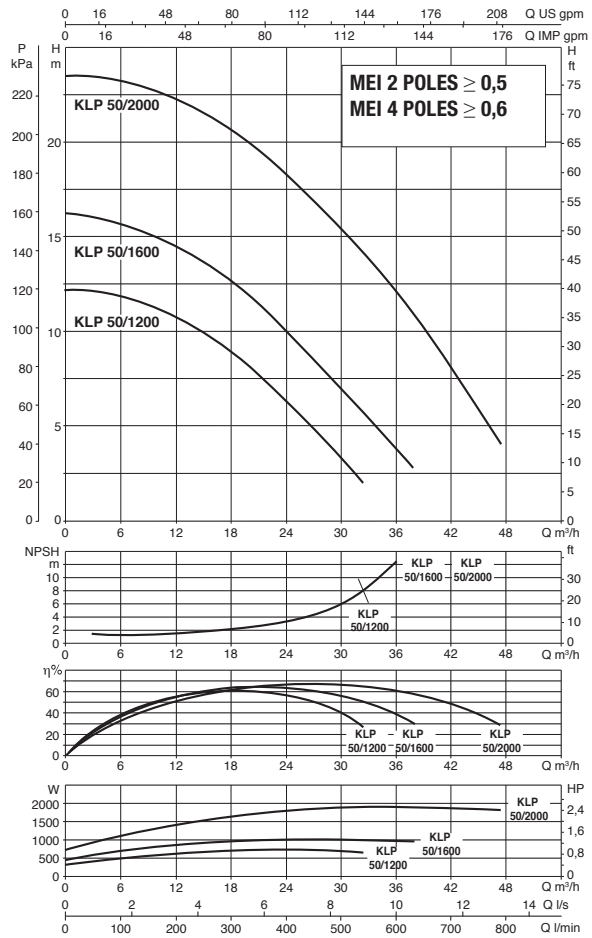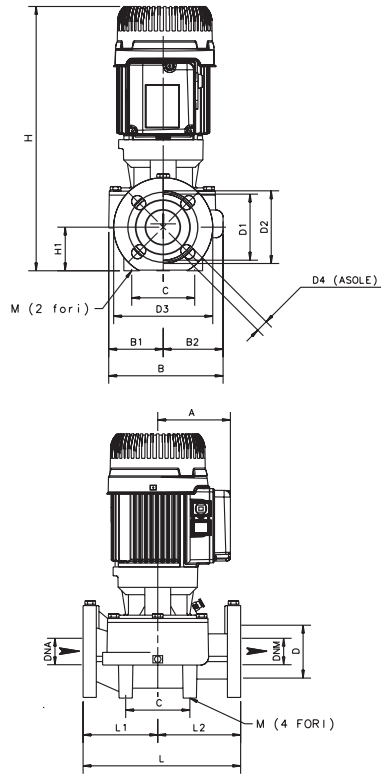



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		µF	Vc
KLP 50-1200 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2840	1,04	0,72	0,98	4,93	20	450
KLP 50-1200 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2842	0,92	0,72	0,97	3,72-2,15	-	-
KLP 50-1600 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2844	1,56	1,01	1,37	7,15	40	450
KLP 50-1600 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2746	1,32	1,01	1,38	4,34-2,51	-	-
KLP 50-2000 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2754	2,43	1,83	2,49	11,06	40	450
KLP 50-2000 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2832	2,34	1,83	2,49	7,59-4,39	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT Kg
																			L/A	L/B	H		
KLP 50/1200	110	204	94	110	100	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	280	140	170	2 HOLES 10	470	280	330	0,043	26,6
KLP 50-1600	110	204	94	110	100	50	50	90	110	125	165		414	73	280	140	170		470	280	330	0,043	26,7
KLP 50-2000	115	204	94	110	100	50	50	90	110	125	165		423	73	280	140	170		510	310	470	0,074	33

KLM / KLP 65 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

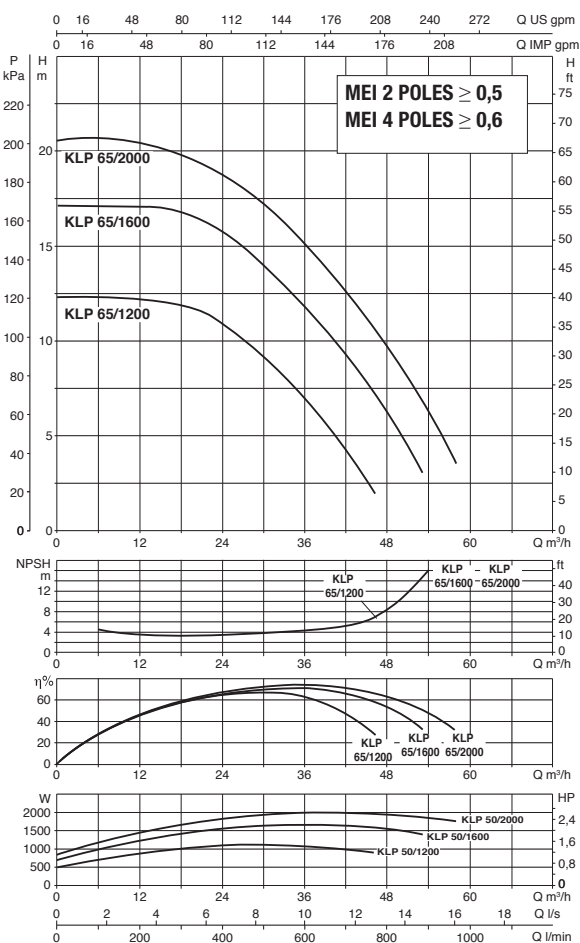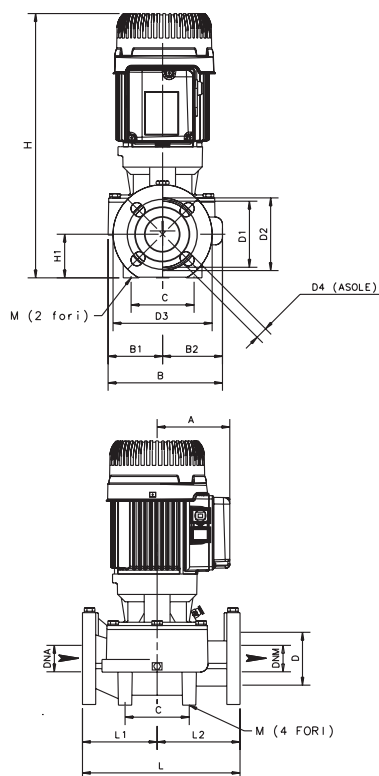



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL kW	HP	In A
KLP 65-1200 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2910	1,34	1,12	1,52	5,64-3,26
KLP 65-1600 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2863	1,99	1,65	2,25	6,49-3,75
KLP 65-2000 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2828	2,51	2,00	2,72	8,08-4,67

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT kg
																			L/A	L/B	H		
KLP 65/1200	114	228	99	129	100	65	65	110	130	145	185	4 HOLES 18x25,5	433	82	340	170	170	2 HOLES 12	510	310	470	0,074	35,1
KLP 65-1600	114	228	99	129	100	65	65	110	130	145	185		433	82	340	170	170		510	310	470	0,074	35,2
KLP 65-2000	118	228	99	129	100	65	65	110	130	145	185		517	82	340	170	170		520	290	700	0,104	38,2

KLM / KLP 80 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

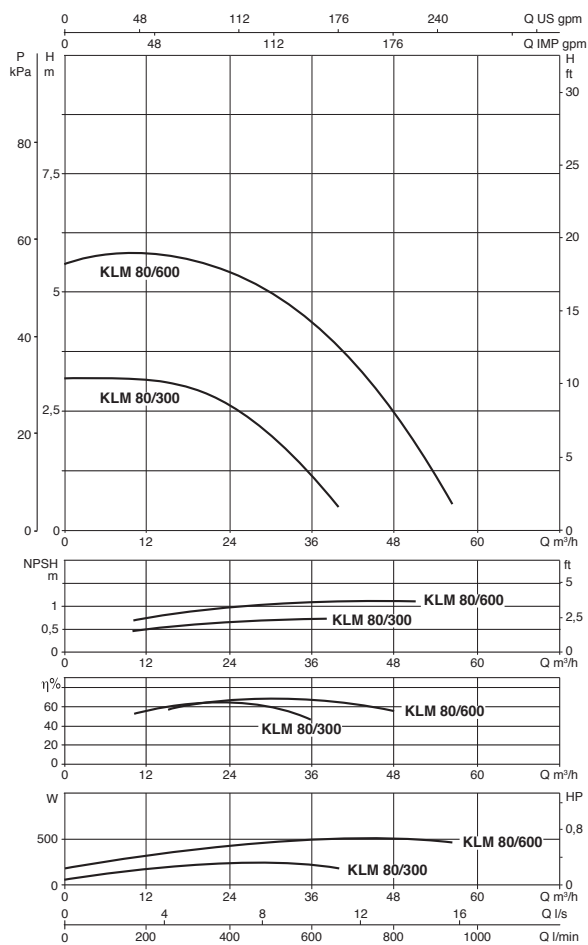
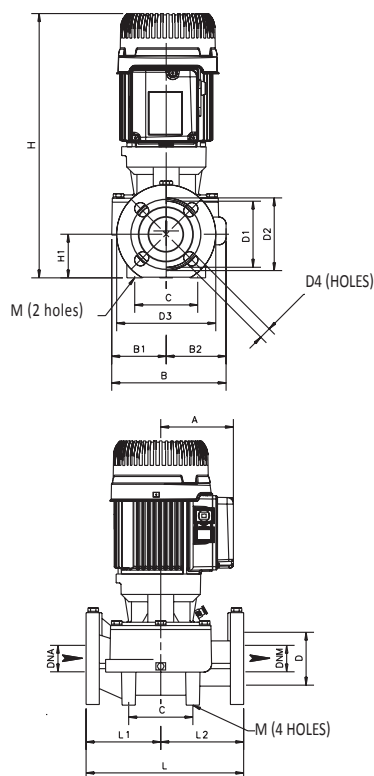


MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
KLM 80-300 T	360	DN 80	3 x 230 - 400 V ~	4 POLES	1460	0,36	0,25	0,33	1,2/0,7
KLM 80-600 T	360	DN 80	3 x 230 - 400 V ~	4 POLES	1400	0,75	0,75	1	2,8/1,6

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (m³)	WEIGHT kg
																			L/A	L/B	H		
KLM 80/300	110	229	99	130	115	80	80	128	150	160	200	4 HOLES 18x23	453	97	360	190	170	2 HOLES 12	510	310	470	0,074	32,5
KLM 80/600	110	229	99	130	115	80	80	128	150	160	200		453	97	360	190	170		510	310	470	0,074	36,7

KLM / KLP 80 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

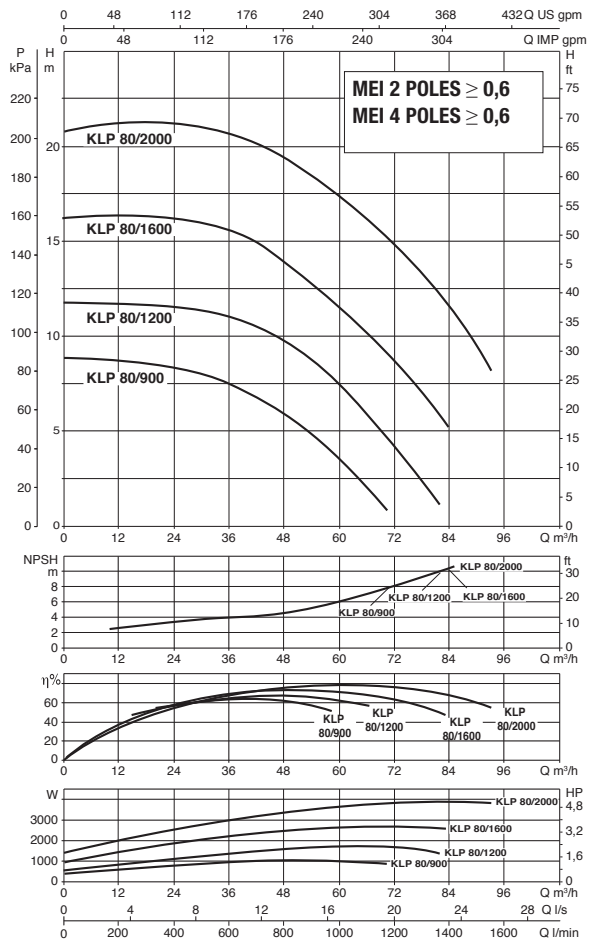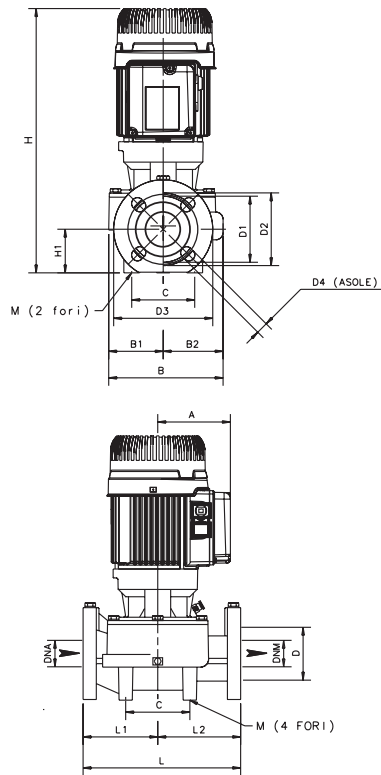



The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
KLP 80-900 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2920	1,4	1,84	2,5	5,2/3,51
KLP 80-1200 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2840	2,1	1,84	2,5	6,6/4,31
KLP 80-1600 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2796	3,20	2,55	3,5	10,28-5,94
KLP 80-2000 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2868	4,72	3,67	5,0	13,94-8,06

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																			L/A	L/B	H		
KLP 80/900	118	229	99	130	115	80	80	128	150	160	200	4 HOLES 18x23	537	97	360	190	170	2 HOLES 12	520	290	700	0,104	39,6
KLP 80/1200	118	229	99	130	115	80	80	128	150	160	200		537	97	360	190	170		520	290	700	0,104	40
KLP 80-1600	118	229	99	130	115	80	80	128	150	160	200		537	97	360	190	170		520	290	700	0,104	42
KLP 80-2000	135	229	99	130	115	80	80	128	150	160	200		526	97	360	190	170		520	290	700	0,104	48

DKLM / DKLP40 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

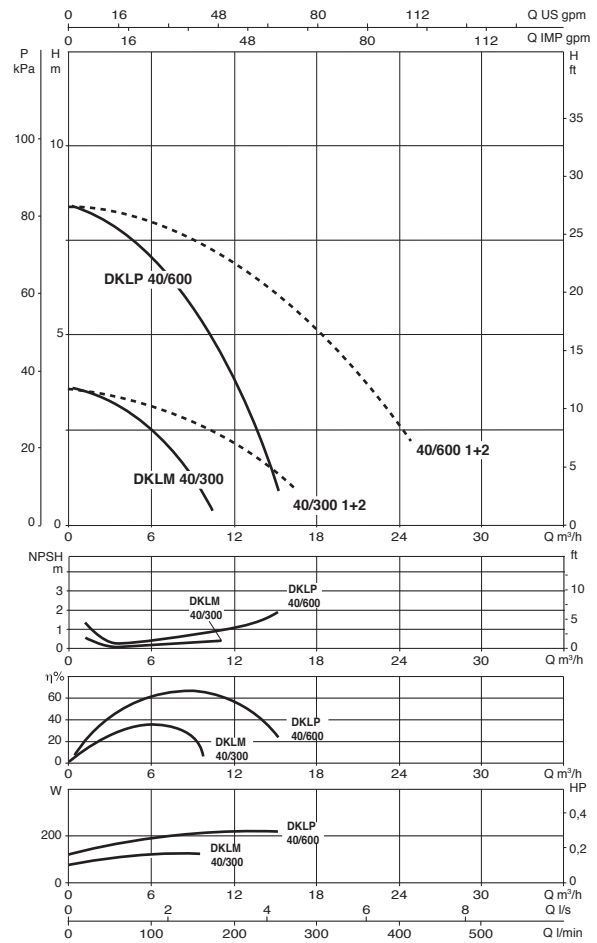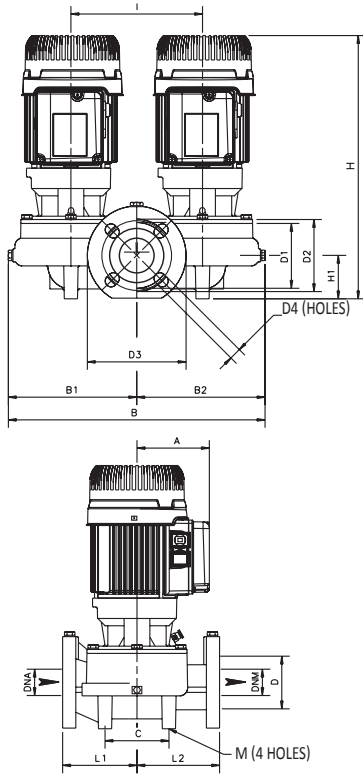

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
DKLM 40-300 M	250	DN 40	1 x 220 - 240 V ~	4 POLES	1420	0,20	0,10	0,14	1,12	8	450
DKLM 40-300 T	250	DN 40	3 x 230 / 400 V ~	4 POLES	1466	0,16	0,10	0,14	1,04-0,6	-	-
DKLP 40-600 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2937	0,60	0,30	0,41	3,29	20	450
DKLP 40-600 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2898	0,49	0,30	0,41	2,13-1,23	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLM 40/300	110	437	217	220	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	200	250	125	125	4 HOLES 10	530	280	470	0,07	38,2
DKLP 40/600	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	41,8

DKLM / DKLP40 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

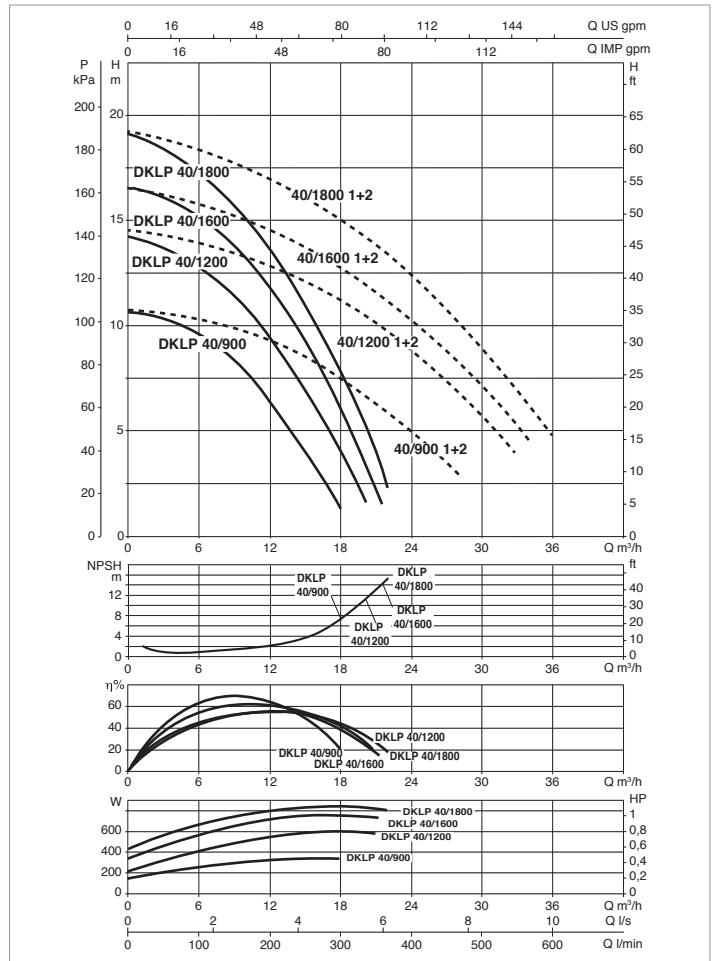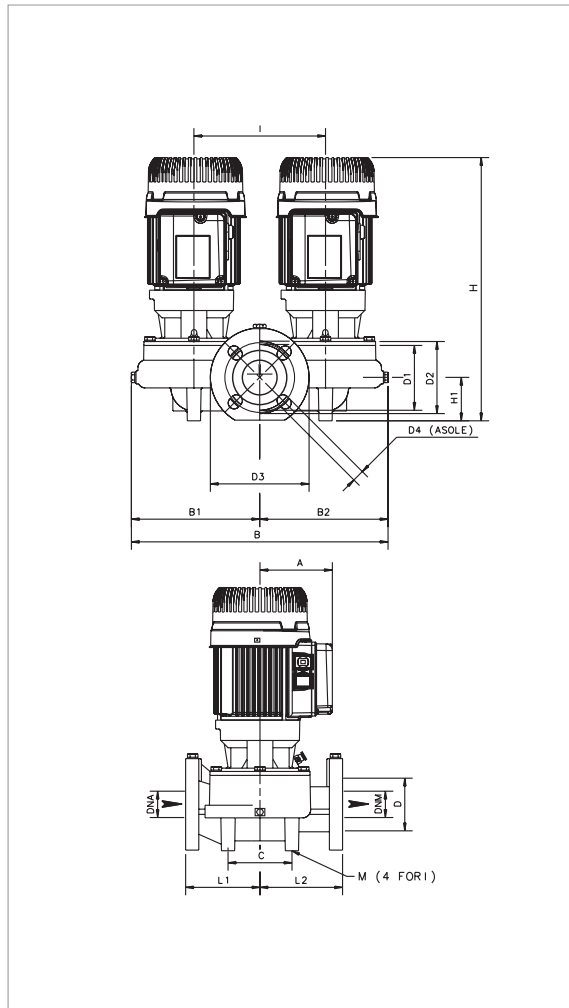

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		µF	Vc
DKLP 40-900 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2913	0,73	0,41	0,56	3,75	20	450
DKLP 40-900 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2851	0,63	0,41	0,56	2,37-1,37	-	-
DKLP 40-1200 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2873	0,91	0,54	0,73	4,40	20	450
DKLP 40-1200 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2776	0,82	0,54	0,73	2,70-1,56	-	-
DKLP 40-1600 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2812	1,18	0,75	1,01	4,71	20	450
DKLP 40-1600 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2840	0,96	0,75	1,01	3,72-2,15	-	-
DKLP 40-1800 M	250	DN 40	1 x 220 - 240 V ~	2 POLES	2812	1,18	0,85	1,16	5,44	20	450
DKLP 40-1800 T	250	DN 40	3 x 230 / 400 V ~	2 POLES	2841	1,09	0,85	1,15	4-2,31	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLP 40/900	110	437	217	220	100	40	40	80	100	110	150	4 HOLES 18x23	396	66	200	250	125	125	4 HOLES 10	530	280	470	0,07	41,8
DKLP 40/1200	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	41,8
DKLP 40-1600	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	45,8
DKLP 40-1800	110	437	217	220	100	40	40	80	100	110	150		396	66	200	250	125	125		530	280	470	0,07	45,8

DKLM / DKLP 50 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

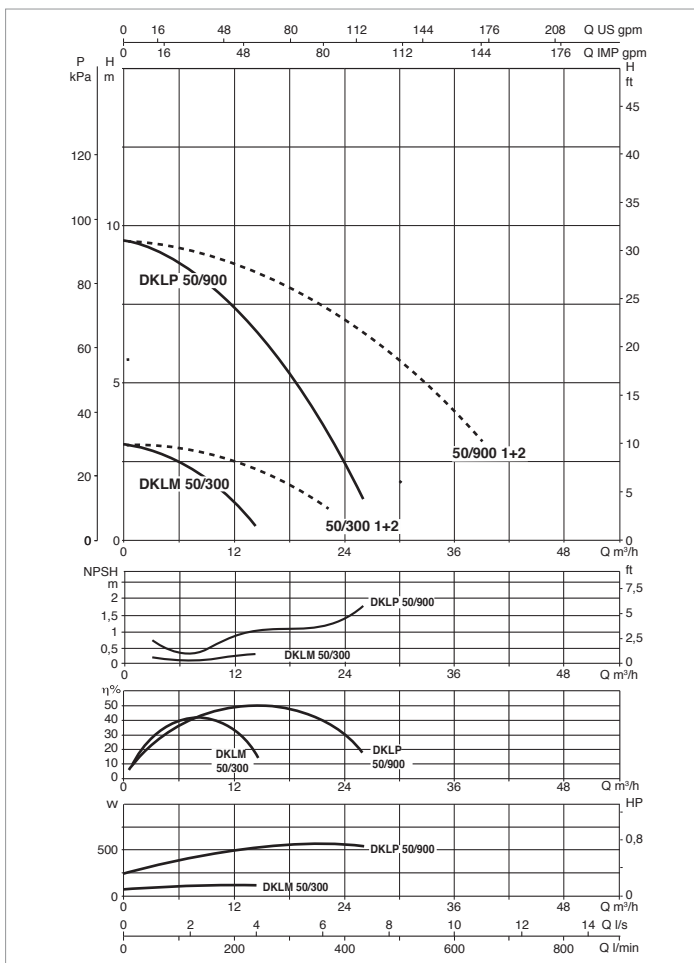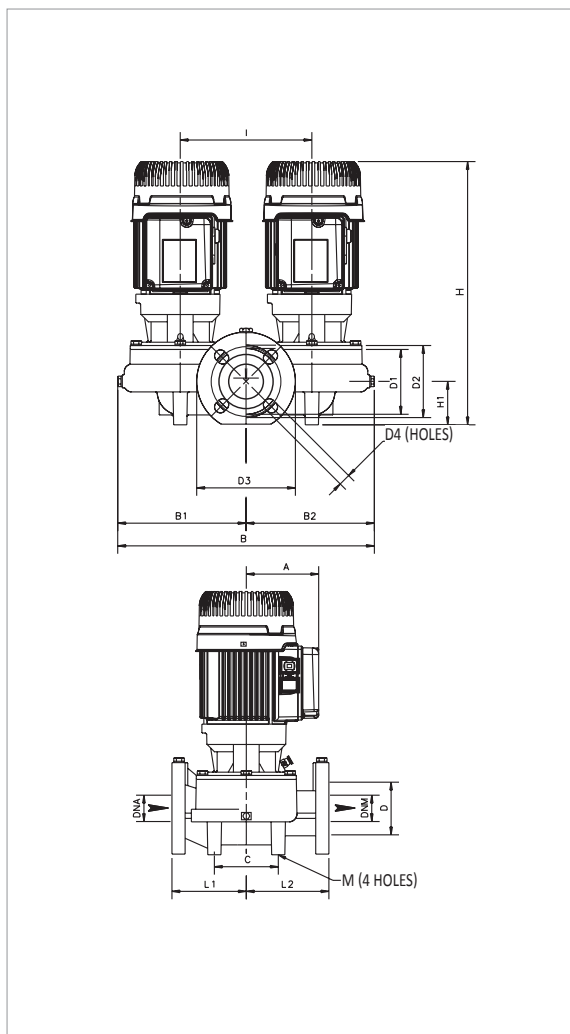

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
DKLM 50-300 M	280	DN 50	1 x 220 - 240 V ~	4 POLES	1410	0,21	0,11	0,15	1,10	8	450
DKLM 50-300 T	280	DN 50	3 x 230 / 400 V ~	4 POLES	1463	0,17	0,11	0,15	1,02-0,59	-	-
DKLP 50-900 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2898	0,80	0,51	0,69	4,02	20	450
DKLP 50-900 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2897	0,67	0,51	0,69	3,39-1,96	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLM 50/300	110	434	217	217	120	50	50	90	110	125	165	4 HOLES 18x25,5	410	73	240	280	140	170	4 HOLES 14	540	420	610	0,138	51
DKLM 50/600	110	434	217	217	120	50	50	90	110	125	165		414	73	240	280	140	170		540	420	610	0,138	52
DKLP 50/900	110	434	217	217	120	50	50	90	110	125	165		414	73	240	280	140	170		540	420	610	0,138	54

DKLM / DKLP 50 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

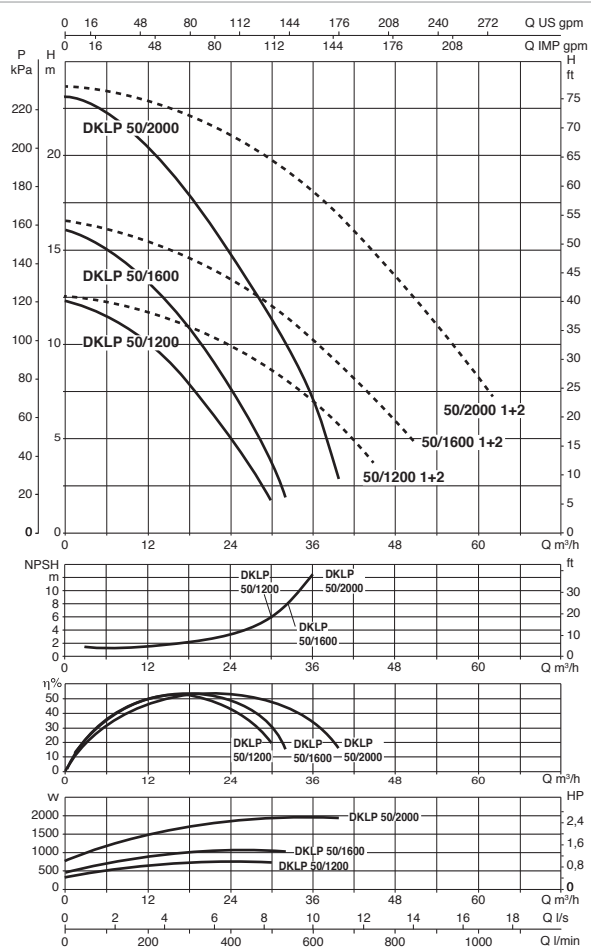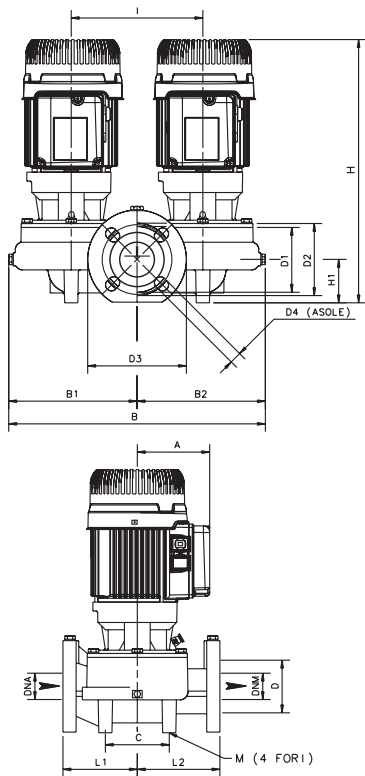

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA								
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A	CAPACITOR	
							kW	HP		μF	Vc
DKLP 50-1200 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2840	1,04	0,72	0,98	4,93	20	450
DKLP 50-1200 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2842	0,92	0,72	0,97	3,72-2,15	-	-
DKLP 50-1600 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2844	1,56	1,01	1,37	7,15	40	450
DKLP 50-1600 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2746	1,32	1,01	1,38	4,34-2,51	-	-
DKLP 50-2000 M	280	DN 50	1 x 220 - 240 V ~	2 POLES	2754	2,43	1,83	2,49	11,06	40	450
DKLP 50-2000 T	280	DN 50	3 x 230 / 400 V ~	2 POLES	2832	2,34	1,83	2,49	7,59-4,39	-	-

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLP 50/1200	110	434	217	217	120	50	50	90	110	125	165	4 HOLES 18x25,5	414	73	240	280	140	170	4 HOLES 14	540	420	610	0,138	54,2
DKLP 50-1600	110	434	217	217	120	50	50	90	110	125	165		414	73	240	280	140	170		540	420	610	0,138	54,5
DKLP 50-2000	110	434	217	217	120	50	50	90	110	125	165		423	73	240	280	140	170		540	420	610	0,138	58,5

DKLM / DKLP 65 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

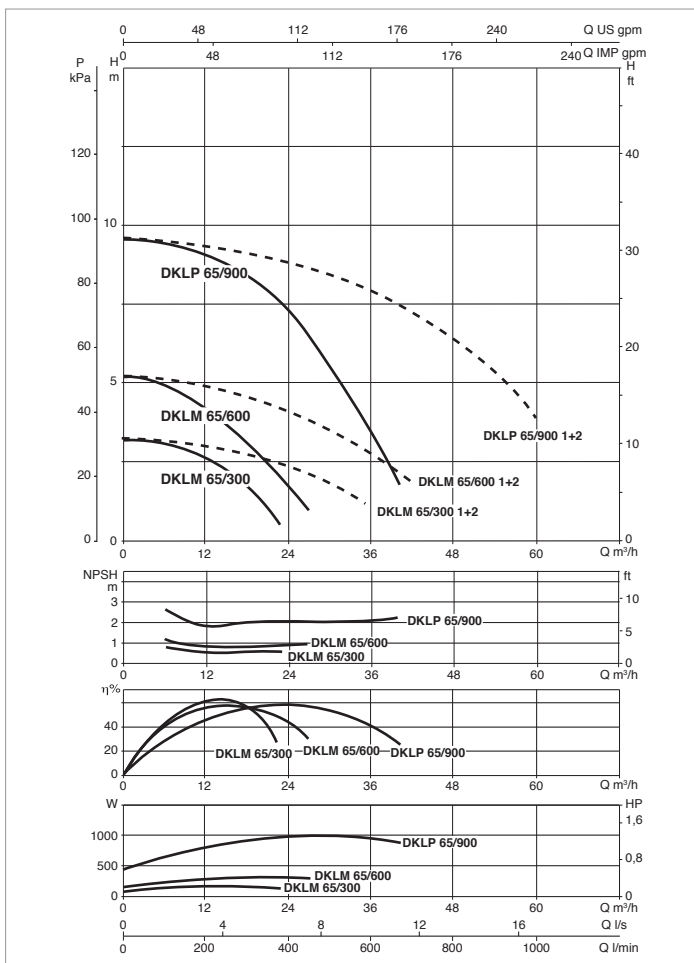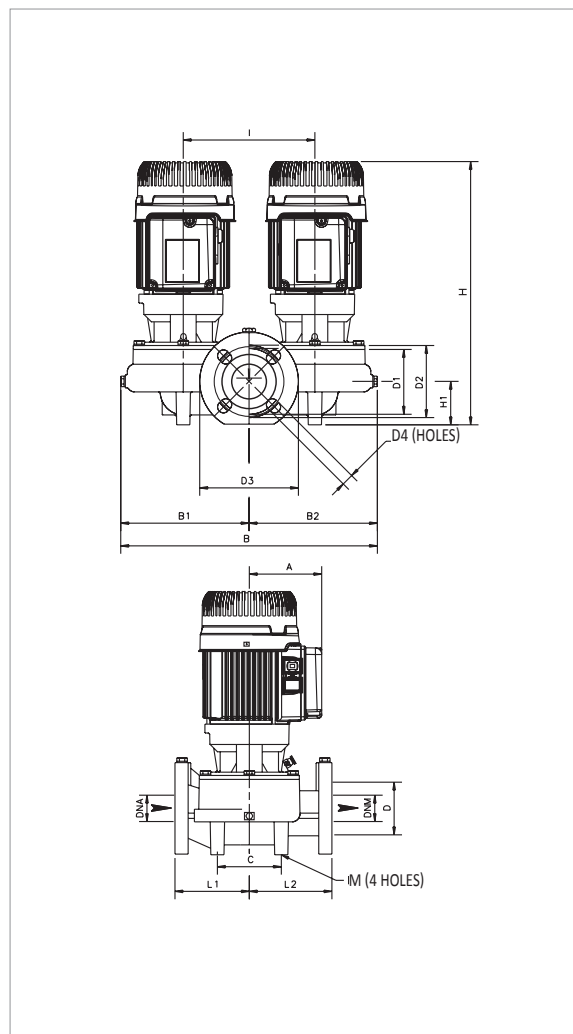

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
DKLM 65-300 T	340	DN 65	3 x 230 / 400 V ~	4 POLES	1445	0,22	0,15	0,20	1,07-0,62
DKLM 65-600 T	340	DN 65	3 x 230 / 400 V ~	4 POLES	1391	0,36	0,24	0,33	1,30-0,75
DKLP 65-900 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2937	0,99	0,80	1,09	5,05-2,92

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLM 65/300	110	455	226	229	100	65	65	110	130	145	185	4 HOLES 18x25,5	433	82	240	340	170	170	4 HOLES 14	540	520	610	0,138	55
DKLM 65/600	110	455	226	229	100	65	65	110	130	145	185		433	82	240	340	170	170		540	520	610	0,138	62
DKLP 65/900	114	455	226	229	100	65	65	110	130	145	185		443	82	240	340	170	170		540	520	610	0,138	66

DKLM / DKLP 65 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

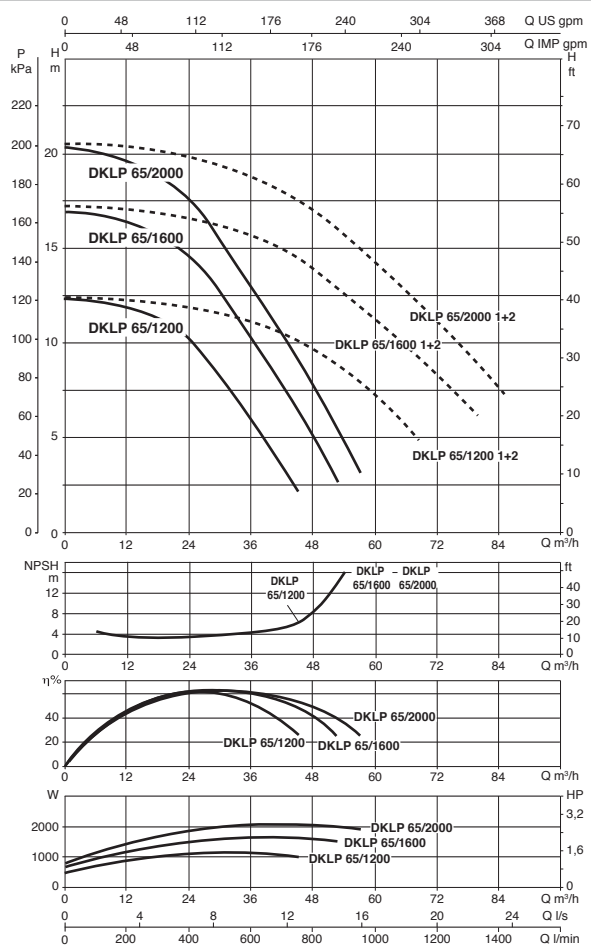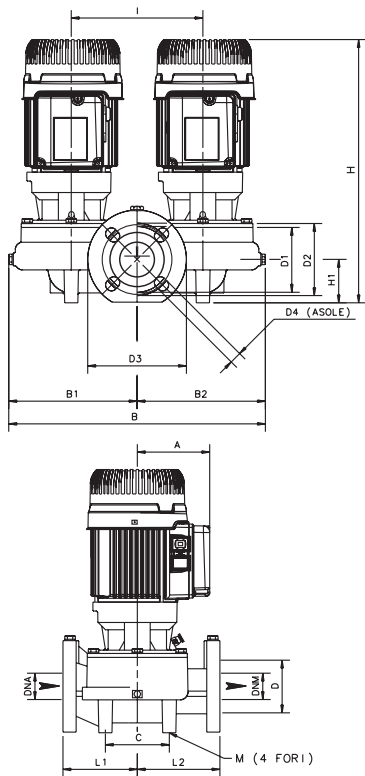

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
DKLP 65-1200 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2910	1,34	1,12	1,52	5,64-3,26
DKLP 65-1600 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2863	1,99	1,65	2,25	6,49-3,75
DKLP 65-2000 T	340	DN 65	3 x 230 / 400 V ~	2 POLES	2828	2,51	2,00	2,72	8,08-4,67

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLP 65/1200	114	455	226	229	100	65	65	110	130	145	185	4 HOLES 18x23	443	82	240	340	170	170	4 HOLES 14	540	520	610	0,138	66,2
DKLP 65-1600	114	455	226	229	100	65	65	110	130	145	185		443	82	240	340	170	170		540	520	610	0,138	66,5
DKLP 65-2000	118	455	226	229	100	65	65	110	130	145	185		517	82	240	340	170	170		540	420	800	0,189	72,5

DKLM / DKLP 80 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

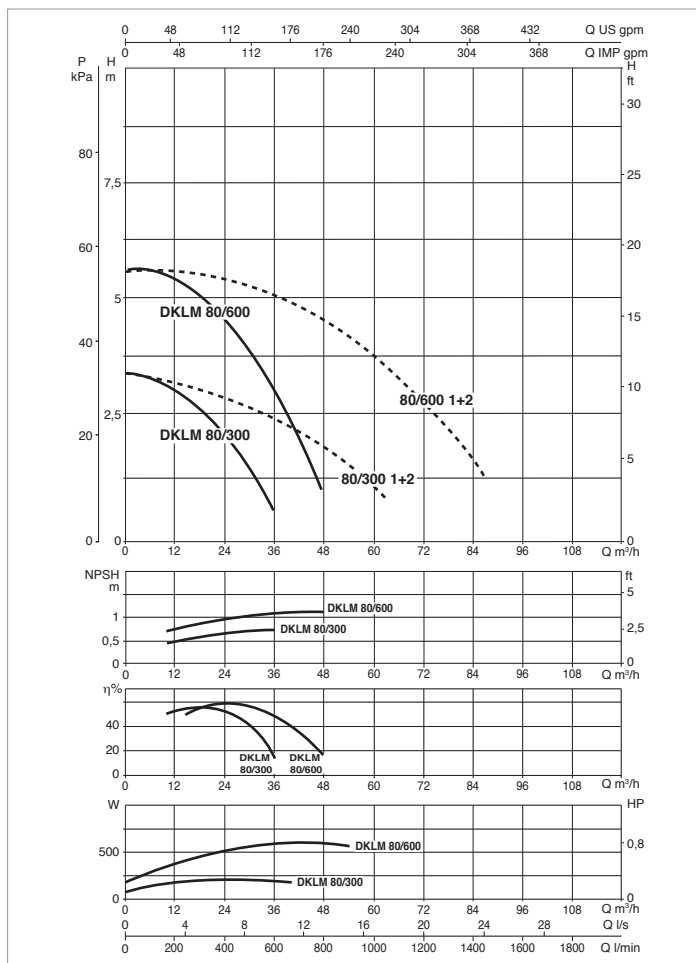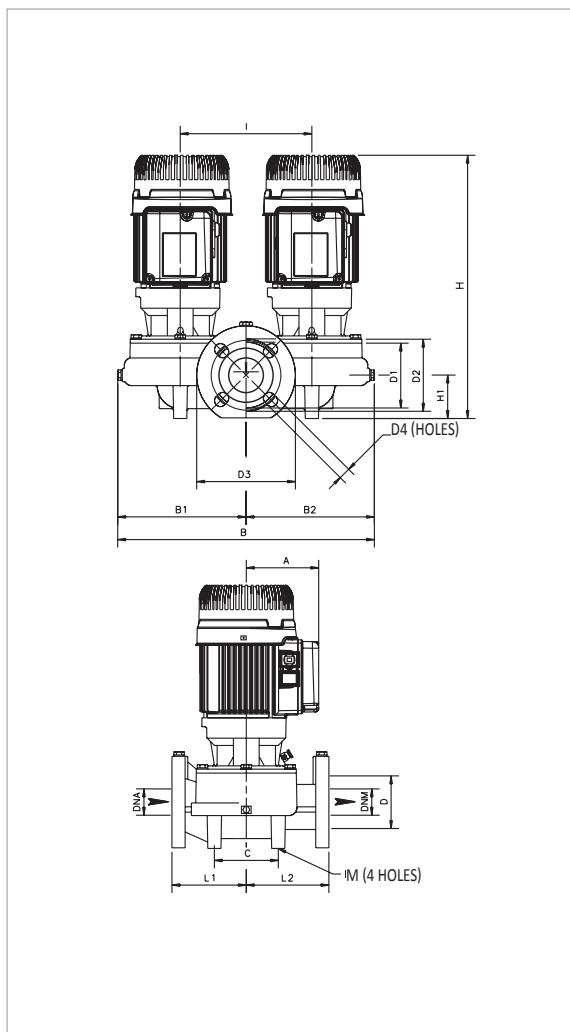

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.



For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
DKLM 80-300 T	360	DN 80	3 x 230 - 400 V ~	4 POLES	1460	0,36	0,25	0,33	1,2/0,7
DKLM 80-600 T	360	DN 80	3 x 230 - 400 V ~	4 POLES	1400	0,75	0,75	1	2,8/1,6

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLM 80/300	110	463	230	233	115	80	80	128	150	160	200	4 HOLES 18x23	453	97	240	360	190	170	4 HOLES 14	540	420	610	0,138	62
DKLM 80/600	110	463	230	233	115	80	80	128	150	160	200		453	97	240	360	190	170		540	420	610	0,138	70

DKLM / DKLP 80 - IN-LINE ELECTRIC PUMPS FOR HEATING, AIR CONDITIONING, REFRIGERATION, SOLAR, AND SANITARY SYSTEMS - SINGLE, FLANGED

Pumped liquid temperature range: from -15 °C to +120 °C - Maximum ambient temperature: +40 °C

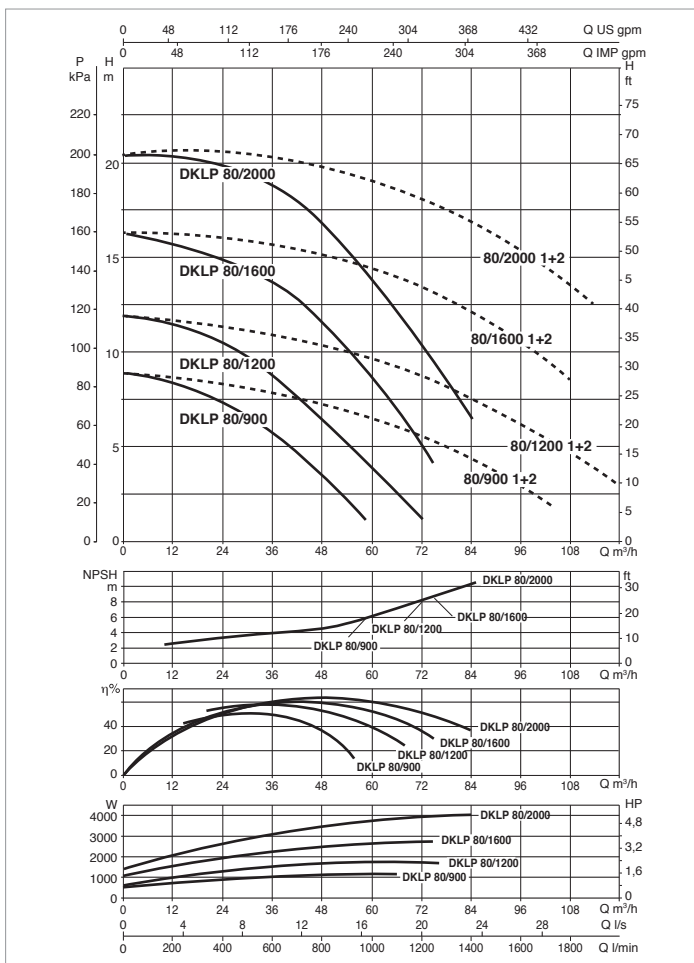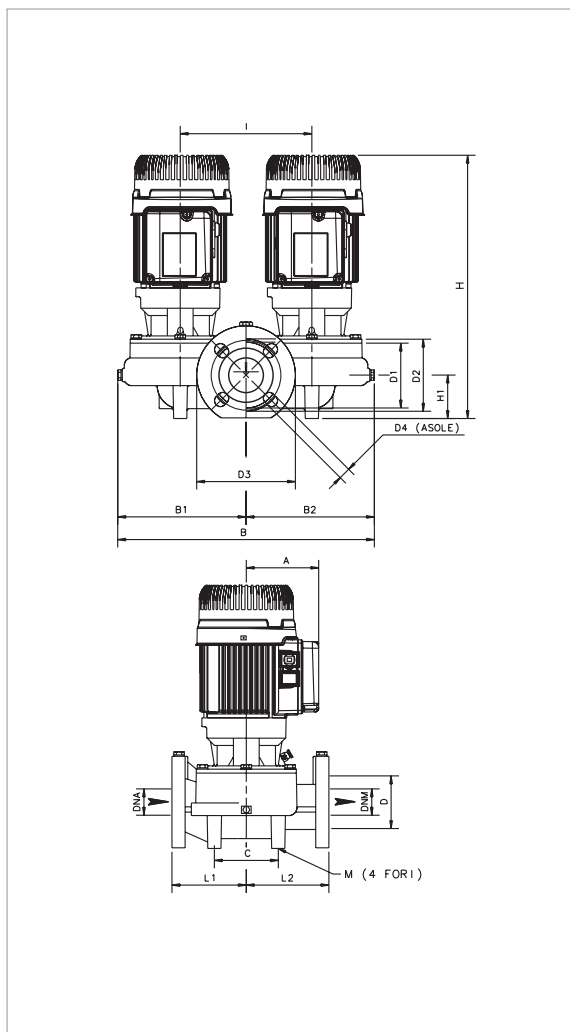

The performance curves are based on kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 9906.

For the MEI index refer to the hydraulic data of the individual pump.

MODEL	CENTRE DISTANCE	PUMP CONNECTIONS	ELECTRICAL DATA						
			POWER INPUT 50 Hz	MOTOR TYPE	n r.p.m.	P1 MAX kW	P2 NOMINAL		In A
DKLP 80-900 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2920	1,4	1,84	2,5	5,2/3,51
DKLP 80-1200 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2840	2,1	1,84	2,5	6,6/4,31
DKLP 80-1600 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2796	3,20	2,55	3,5	10,28-5,94
DKLP 80-2000 T	360	DN 80	3 x 230 - 400 V ~	2 POLES	2868	4,72	3,67	5,0	13,94-8,06

MODEL	A	B	B1	B2	C	DNA	DNM	D	D1	D2	D3	D4	H	H1	I	L	L1	L2	M	PACKING DIMENSIONS			VOLUME (mc)	WEIGHT KG
																				L/A	L/B	H		
DKLP 80/900	118	463	230	233	115	80	80	128	150	160	200	4 HOLES 18x23	537	97	240	360	190	170	4 HOLES 14	540	420	800	0,189	76
DKLP 80/1200	118	463	230	233	115	80	80	128	150	160	200		537	97	240	360	190	170		540	420	800	0,189	76,2
DKLP 80-1600	118	463	230	233	115	80	80	128	150	160	200		537	97	240	360	190	170		540	420	800	0,189	81,2
DKLP 80-2000	135	463	230	233	115	80	80	128	150	160	200		526	97	240	360	190	170		540	420	800	0,189	93,2